

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number
WO 2005/016744 A1

(51) International Patent Classification⁷: B63J 2/12,
B63B 25/04, 25/08, C08C 3/00

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(21) International Application Number:
PCT/GB2004/003230

(22) International Filing Date: 26 July 2004 (26.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0318326.6 5 August 2003 (05.08.2003) GB

(71) Applicant and

(72) Inventor: LAM, David, Choon, Sen [SG/GB]; 73 Gordon Avenue, Stanmore, Middlesex HA7 3QR (GB).

(74) Agent: LAURENCE SHAW & ASSOCIATES LIMITED; 1 Hagley Road, Edgbaston, Birmingham B16 8TG (GB).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR TRANSPORTING SEMI-PROCESSED RUBBER

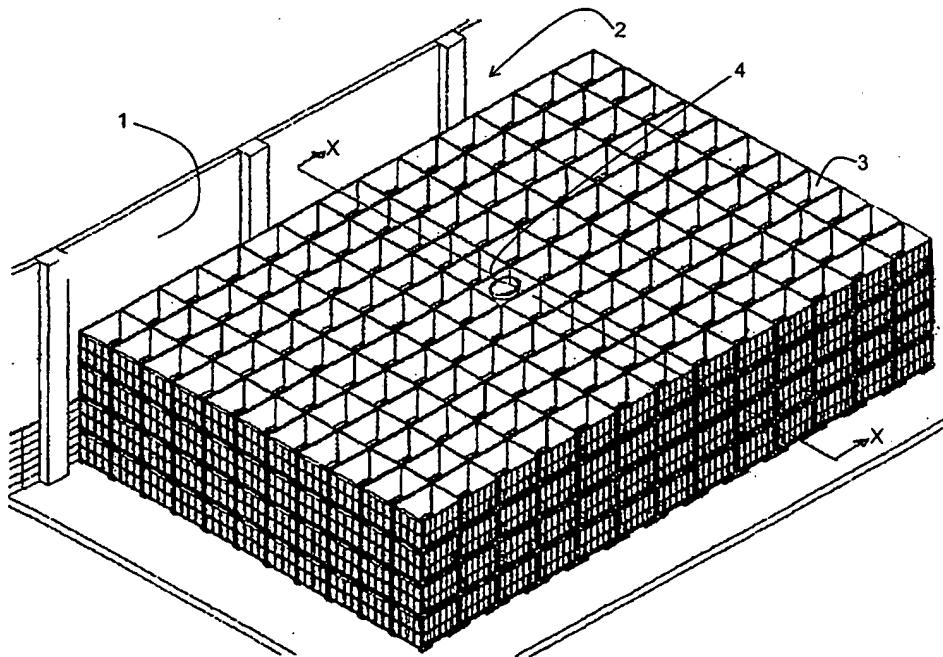

WO 2005/016744 A1

(57) Abstract: A method of transporting semi-processed rubber comprises locating the semi-processed rubber in a ship and supplying heat to the semi-processed rubber during transit to prevent solidification of, and/or crystallisation in, the semi-processed rubber. Heat may be re-circulated from the ship's engine to heat the hold in which the rubber is stored. Insulating material may be provided to insulate the walls of the ship's hold.